






# 深圳市晶创和立科技有限公司

SPECIFICATION  
OF  
PYROELECTRIC PASSIVE  
INFRARED SENSOR

MODEL NO. RE200B

PART NO. \_\_\_\_\_

Agent: Hi-Rel (Hong Kong)

PYROELECTRIC PASSIVE INFRARED SENSOR  MODEL NO. RE200B	PAGE 1 / 6	DRAWING NO. 1707982	REV : A
	NIPPON CERAMIC CO., LTD.		
APPROVED BY 	CHECKED BY 	DRAWN BY 	



# 深圳市晶创和立科技有限公司

## SCOPE

THIS SPECIFICATION DESCRIBES A PYROELECTRIC PASSIVE INFRARED SENSOR SUPPLIED BY NIPPON CERAMIC CO., LTD.

## TYPE OF SENSOR

BALANCED DIFFERENTIAL (SERIES OPPOSED TYPE.)

## PHYSICAL CONFIGURATION

- 1) PACKAGE : TO-5 METAL CAN WITH DIMENSIONS SHOWN IN FIGURE 1-C (NICKEL-PLATED)
- 2) ELEMENT GEOMETRY : TWO SENSITIVE AREAS 2.0 mm LONG, 1.0 mm WIDE AND SPACED 1.0 mm APART.
- 3) ELEMENT ORIENTATION : SEE FIGURE 1-B
- 4) LEAD CONFIGURATION : SEE FIGURE 1-C, 1-D

## ELECTRICAL CHARACTERISTICS (AT 25 ± 5 °C)

- 1) CIRCUIT CONFIGURATION : THREE-TERMINAL SENSOR WITH SOURCE FOLLOWER  
SEE FIGURE 2
- 2) OPERATING VOLTAGE : 3 ~ 10 V DC (Rs: 47KΩ)
- 3) SOURCE VOLTAGE : 0.3 ~ 1.5 V (VD: 5V, Rs: 47KΩ)
- 4) SIGNAL OUTPUT : MIN. 2.5 Vp-p (TYP. 4.0 Vp-p)

SIGNAL OUTPUT IS MEASURED AT CHOPPER FREQUENCY OF 1 Hz WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB (AT 1 Hz) AND SUBMITTED TO THE EMISSION OF INFRARED ENERGY OF 13 μW/cm<sup>2</sup> FROM 420 K BLACK BODY.  
SEE FIGURE 3

- 5) NOISE OUTPUT : MAX. 250 mVp-p (TYP. 90 mVp-p)

NOISE OUTPUT SHALL BE MEASURED FOR 20 SECONDS WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB AND SHUT OUT FROM INFRARED ENERGY.  
SEE FIGURE 3

MODEL NO. : RE200B

PART NO. :

PAGE  
2 / 6

DRAWING NO.  
1707982

REV :  
A

NIPPON CERAMIC CO., LTD.



# 深圳市晶创和立科技有限公司

6) BALANCE OUTPUT : MAX. 15 %

$$[ BO / | SA+SB | ] \leq 0.15$$

BO : BALANCE OUTPUT

SA : SIGNAL OUTPUT ON ELEMENT A

SB : SIGNAL OUTPUT ON ELEMENT B

BALANCE OUTPUT IS MEASURED AT CHOPPER FREQUENCY OF 1 Hz WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB (AT 1 Hz) AND SUBMITTED TO THE EMISSION OF INFRARED ENERGY OF  $13 \mu W/cm^2$  FROM 420 K BLACK BODY.  
SEE FIGURE 3

7) FREQUENCY RESPONSE : 0.3 Hz TO 3.0 Hz /  $\pm 10$  dB

## OPTICAL CHARACTERISTICS

1) FIELD OF VIEW : 138° FROM CENTER OF ELEMENT ON AXIS X  
: 125° FROM CENTER OF ELEMENT ON AXIS Y  
: SEE FIGURE 1-A

2) FILTER SUBSTRATE : SILICON

3) CUT ON (5 %T ABS) :  $5.0 \pm 0.5 \mu m$

4) TRANSMISSION :  $\geq 70$  % AVERAGE 7~14  $\mu m$

## ENVIRONMENTAL REQUIREMENTS

1) OPERATING TEMPERATURE : -30 °C TO +70 °C

2) STORAGE TEMPERATURE : -40 °C TO +80 °C

3) RELATIVE HUMIDITY :

THE SENSOR SHALL OPERATE WITHOUT INCREASE IN NOISE OUTPUT WHEN EXPOSED TO 90 ~ 95 % RH AT 30 °C CONTINUOUSLY.

4) HERMETIC SEAL :

THE SENSOR SHALL BE SEALED TO WITHSTAND A VACUUM OF .160 MILLIMETERS OF MERCURY.

MODEL NO. : RE200B

PAGE  
3 / 6

DRAWING NO.  
1707982


REV :  
A

PART NO. :


NIPPON CERAMIC CO., LTD.

## CONFIGURATION (FIGURE 1)


FIELD OF VIEW  
(FIGURE 1-A)

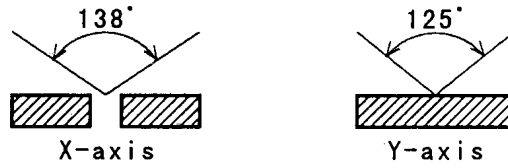


TOP VIEW  
(FIGURE 1-B)

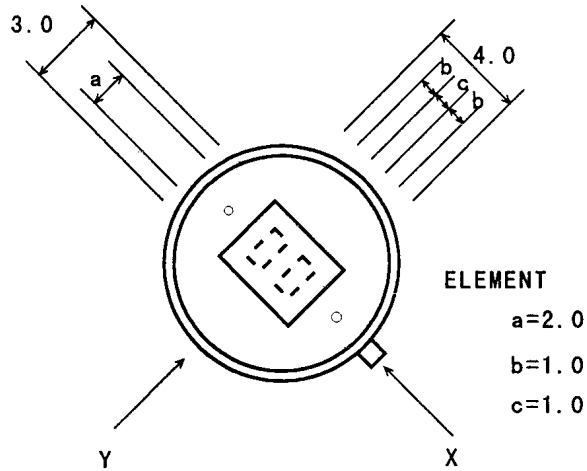

SIDE VIEW  
(FIGURE 1-C)

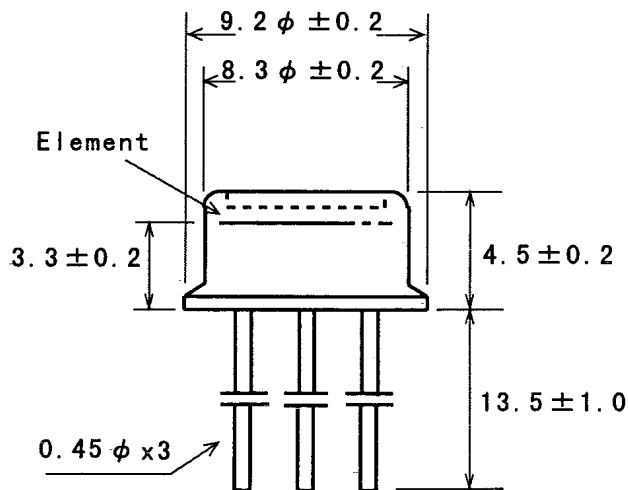

BASE VIEW  
(FIGURE 1-D)

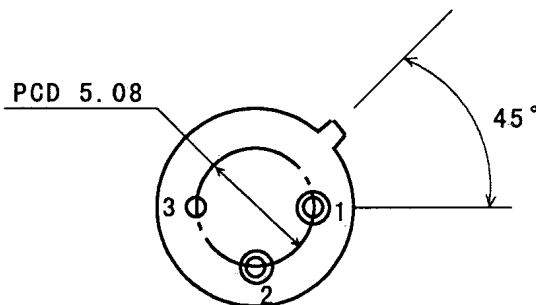

1: DRAIN  
2: SOURCE  
3: GROUND

UNIT : mm

MODEL NO. : RE200B

PART NO. :


PAGE  
4 / 6

DRAWING NO.  
1707982

REV :  
A

NIPPON CERAMIC CO., LTD.

## CIRCUIT CONFIGURATION (FIGURE 2)

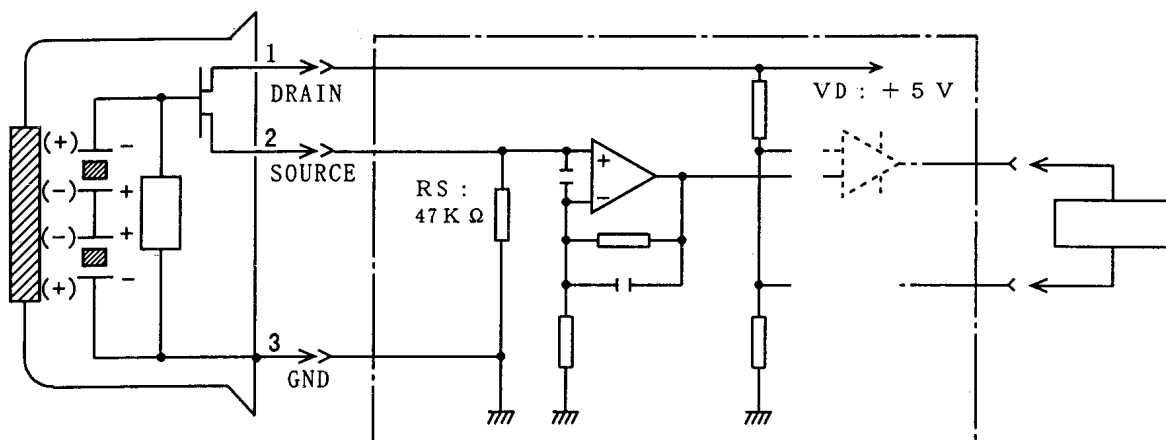


SENSOR

MEASUREMENT AMP.

RECORDER

※ MEASUREMENT AMP.: NON-INVERTED TYPE, GAIN 72.5 dB AT 1 Hz 0.4~2.7 Hz / -3 dB

## TEST SET-UP BLOCK DIAGRAM (FIGURE 3)

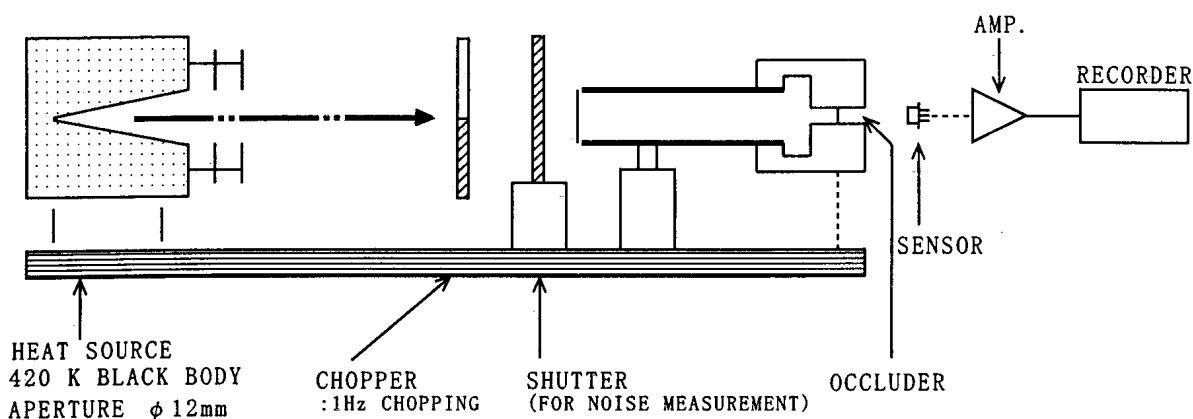

HEAT SOURCE  
420 K BLACK BODY  
APERTURE  $\phi$  12mm

CHOPPER  
:1Hz CHOPPING

SHUTTER  
(FOR NOISE MEASUREMENT)


OCCLUDER

SENSOR


AMP.

RECORDER


### OCCLUDER POSITION



SIGNAL OUTPUT

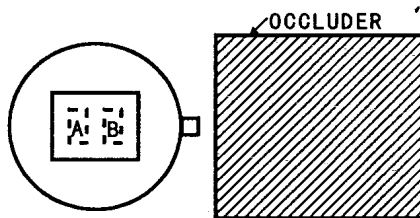

BALANCE OUTPUT



NOISE OUTPUT

MODEL NO. : RE200B

PART NO. :

PAGE

5 / 6

DRAWING NO.

1707982

REV :

A

© NIPPON CERAMIC CO., LTD.



## ※ NOTES

### 1. DESIGN RESTRICTIONS/PRECAUTIONS

FOR OUTDOOR APPLICATIONS, BE SURE TO APPLY SUITABLE SUPPLEMENTARY OPTICAL FILTER AND DRIP-PROOF, ANTI-DEW CONSTRUCTION. THIS SENSOR IS DESIGNED FOR INDOOR USE. IN CASES WHERE SECONDARY ACCIDENTS DUE TO OPERATION FAILURE OR MALFUNCTIONS CAN BE ANTICIPATED, ADD A FAIL SAFE FUNCTION TO THE DESIGN.

### 2. USAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE OR ANY DETERIORATION OF ITS CHARACTERISTICS, DO NOT USE THIS SENSOR IN THE FOLLOWING, OR SIMILAR, CONDITIONS.

- A. IN RAPID ENVIRONMENTAL TEMPERATURE CHANGES.
- B. IN STRONG SHOCK OR VIBRATION.
- C. IN A PLACE WHERE THERE ARE OBSTRUCTING MATERIALS (GLASS, FOG, ETC.) THROUGH WHICH INFRARED RAYS CANNOT PASS WITHIN DETECTION AREA.
- D. IN FLUID, CORROSIVE GASES AND SEA BREEZE.
- E. CONTINUAL USE IN HIGH HUMIDITY ATMOSPHERE.
- F. EXPOSED TO DIRECT SUN LIGHT OR HEADLIGHTS OF AUTOMOBILES.
- G. EXPOSED TO DIRECT WIND FROM A HEATER OR AIR CONDITIONER.

### 3. ASSEMBLY RESTRICTIONS/PRECAUTIONS

#### SOLDERING -----

- A. USE SOLDERING IRONS WHEN SOLDERING.
- B. AVOID KEEPING PINS OF THIS SENSOR HOT FOR A LONG TIME AS EXCESSIVE HEAT MAY CAUSE DETERIORATION OF ITS QUALITY. (E.G. WITHIN 5 SEC. AT 350 °C)

#### WASHING -----


- A. BE SURE TO WASH OUT ALL FLUX AFTER SOLDERING AS REMAINDER MAY CAUSE MALFUNCTIONS.
- B. USE A BRUSH WHEN WASHING. WASHING WITH AN ULTRASONIC CLEANER MAY CAUSE OPERATIONAL FAILURE.

### 4. HANDLING AND STORAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE, APPEARANCE DAMAGE OR ANY DETERIORATION OF ITS CHARACTERISTICS, DO NOT EXPOSE THIS SENSOR TO THE FOLLOWING OR SIMILAR, HANDLING AND STORAGE CONDITIONS.

- A. VIBRATION FOR A LONG TIME.
- B. STRONG SHOCK.
- C. STATIC ELECTRICITY OR STRONG ELECTROMAGNETIC WAVES.
- D. HIGH TEMPERATURE AND HUMIDITY FOR A LONG TIME.
- E. CORROSIVE GASES OR SEA BREEZE.
- F. DIRTY AND DUSTY ENVIRONMENTS THAT MAY CONTAMINATE THE OPTICAL WINDOW.

SENSOR TROUBLES RESULTING FROM MISUSE, INAPPROPRIATE HANDLING OR STORAGE ARE NOT THE MANUFACTURER'S RESPONSIBILITY.

MODEL NO. : RE200B  PART NO. :	PAGE 6 / 6	DRAWING NO. 1707982	REV : A
	 NIPPON CERAMIC CO., LTD.		